1. Description

- M0003D is a 2-way 0º splitter/combiner in a 3mm x 3mm DFN package, fabricated on GaAs IPD process. It operates over 2-6GHz, provides insertion loss of 1.5dB.



M0003D-PDS-F01

Figure 1. M0003D Package Outline

2. Applications

- General-purpose RF Signal Distribution
- Phased Array Radar System

3. Features[1]

- Frequency Range: 2-6GHz
- Insertion Loss: 1.5dB
- Isolation: 19dB
- Input/Output Return Loss: -10dB
- Input/Output Impedance: 50ohm
- Package Size: 3.0 x 3.0 x 0.8mm

[1] EVB Test

4. Brief Typical Performance

Table 1. Brief Typical Performance

Parameter	2-6GHz	Units
Insertion Loss	0.9	dB
Isolation	20	dB
Passband Ripple	±0.5	dB
Input Return Loss	-15	dB
Output Return Loss	-15	dB

Table of Contents

No.	Contents	Page
1	Description	1
2	Applications	1
3	Features	1
4	Brief Typical Performance	1
5	Recommended Operating Conditions	3
6	RF Characteristics	3
7	Typical Performance Curve	3
8	Outline Dimensions	4
9	Application Information	5
10	Recommended Solder Temperature Profile	5
11	Handling Precautions	6
12	Contact Information	6
13	Disclaimer	6

5. Recommended Operating Conditions

Table 2. Recommended Operating Conditions

Parameter	Min.	Typ.	Max.	Units
Operating Temperature Range	-55	25	125	°C

6. RF Characteristics (T_C = 25˚C)

Table 3. RF Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units
Frequency Range	Freq.	2	-	6	GHz
Insertion Loss	IL	0.4	0.9	1.5	dB
Passband Ripple	△L	-	±0.5	-	dB
Isolation	ISO	19	20	-	dB
Input Return Loss	RL_RFC	10	-15	-	dB
Output Return Loss	RL_RF1/RL_RF2	12	-15	-	dB

7. Typical Performance Curve

■ Small-signal Characteristics Curve

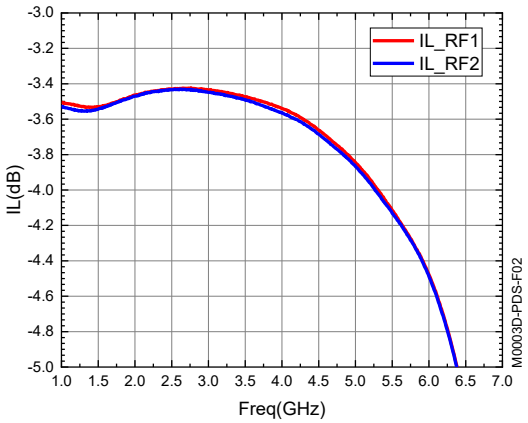


Figure 2. Insertion Loss Characteristics

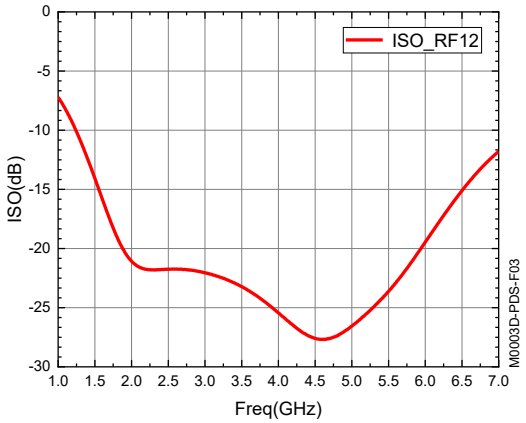


Figure 3. Isolation Characteristics

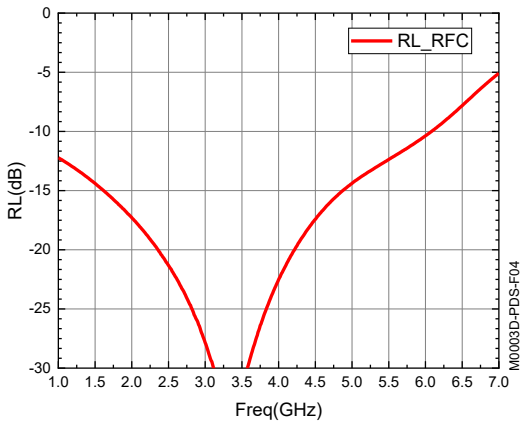


Figure 4. Input Return Loss Characteristics

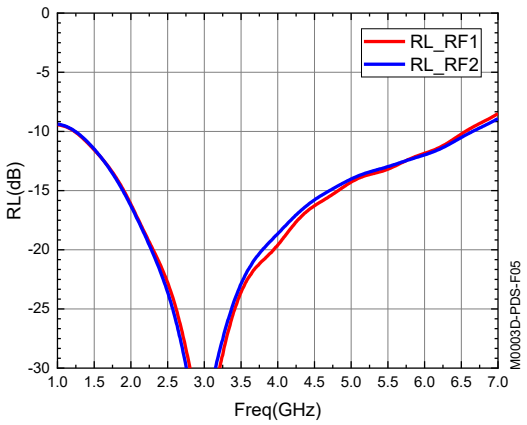


Figure 5. Output Return Loss Characteristics

8. Outline Dimensions

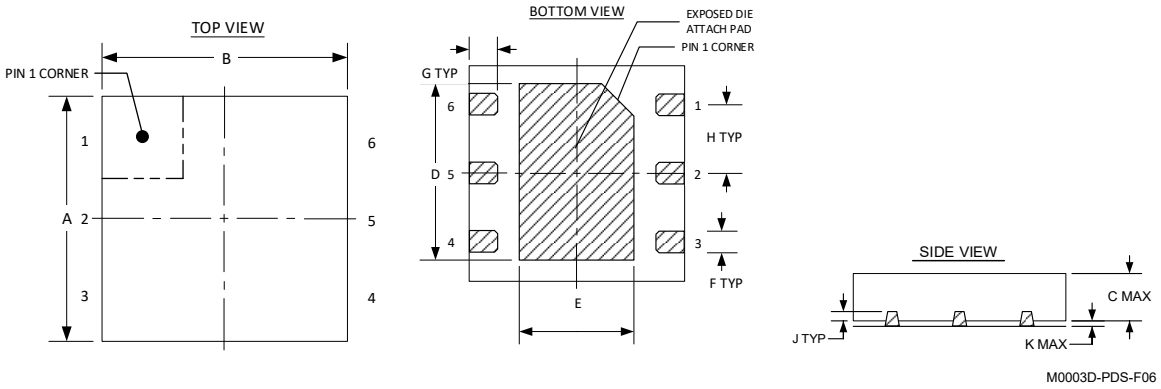


Figure 6. M0003D Outline Dimensions

Table 4. Package Outline Dimensions(mm)

A	B	C	D	E	F	G	H	J	K
3	3	0.75	2.5	1.55	0.3	0.4	0.95	0.2	0.02

Table 5. Pin Description

Pin	Symbol	Description
1 / 3 / 5	GND	RF Ground Pin
2	RFC	RF Input
4	RF1	RF Output 1
6	RF2	RF Output 2

9. Application Information

■ Application Diagram

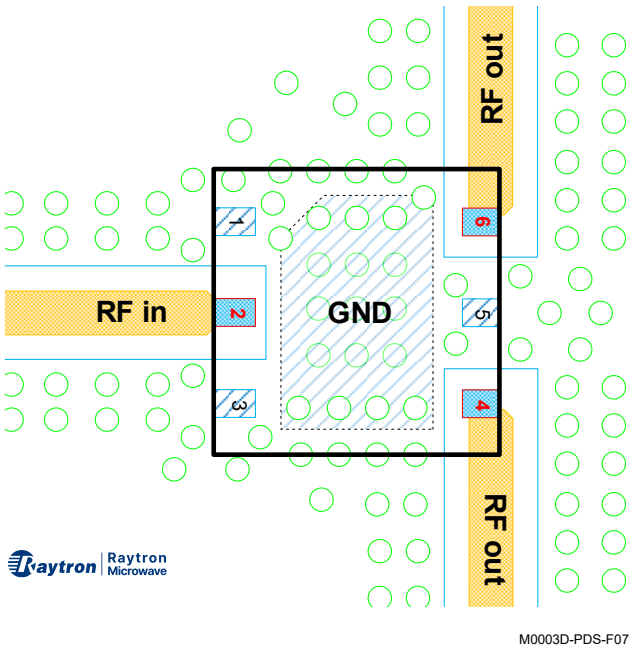


Figure 7. M0003D Application Diagram

10. Recommended Solder Temperature Profile

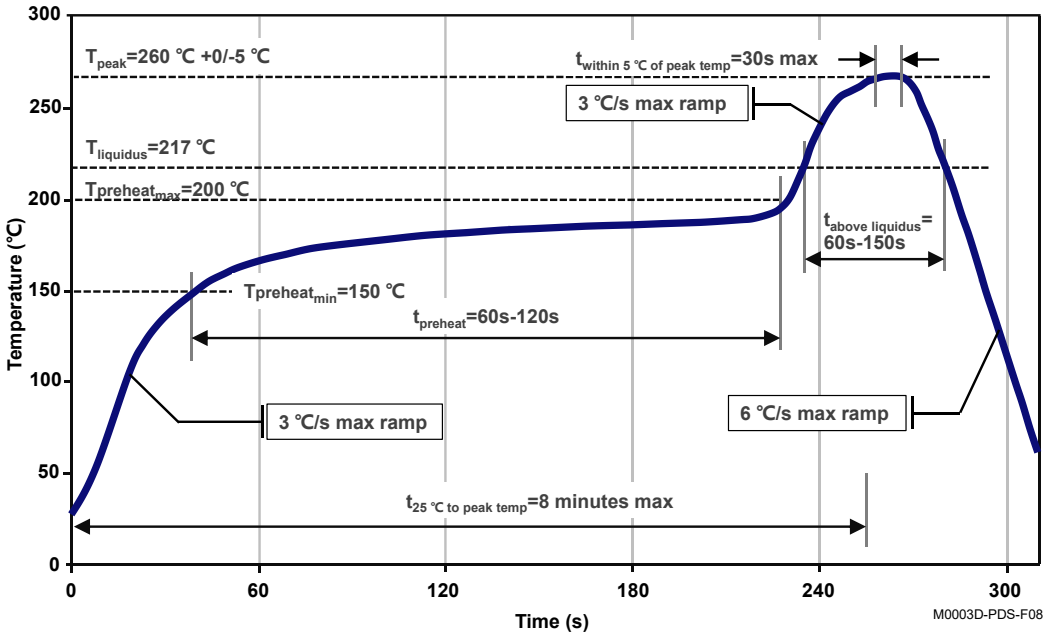


Figure 8. Recommended Solder Temperature Profile

11. Handling Precautions

- **ESD Caution**

  ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore proper ESD precautions should be taken to avoid performance degradation or loss of functionality.



12. Contact Information

For the latest specifications, additional product information, technical support and sales support, please contact:

- **Email:** RF.support@raytrontek.com
- **Web:** www.raytrontek.com

13. Disclaimer

The information provided here is believed to be reliable at the time of publication. Raytron reserves the right to make changes to its products, specifications and product descriptions at any time without notice. Raytron assumes no responsibility for the use of this information and all such information should entirely be at the user's own risk. Raytron makes no warranty about the suitability of its products for specific purpose or application and disclaims all liability, including without limitation consequential and incidental damages. Raytron does not authorize or warrant any Raytron products for use in the life support devices or systems.

Raytron Microwave

Copyright @ Raytron Technology Co.,Ltd.