
1. Description

- The D1306 is a 100W (P_{SAT}) wideband pre-matched gallium nitride (GaN) high electron mobility transistor (HEMT) with first generation RF GaN technology from Raytron.
- The D1306 operates from DC to 3GHz with a 28V supply rail. The device is offered in an industry standard air cavity package.

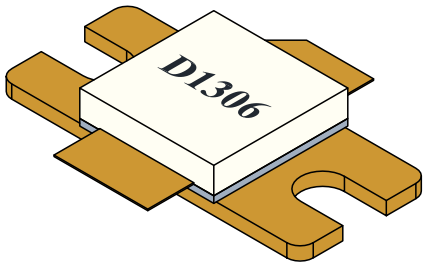

D1306-PDS-F01

Figure 1. D1306 Package Outline

2. Applications

- Military and Civilian Radar
- Land Mobile and Military Radio Communications
- Avionics and Test Instrumentation

3. Features[1]

- Operating Frequency: DC-3GHz
- Output Power (P_{SAT}): 51.3dBm (135W)
- Linear Gain: 20.5dB
- Typical DE @ P_{SAT}: 77.2%
- Operating Voltage: 28V
- CW and Pulse Capable
- Package Type: 400F-A

[1] Measured in Raytron DEMO @1.45GHz


4. Brief Typical Performance

Table 1. Brief Typical Performance

Parameter	1.3GHz	1.6GHz	1.95GHz	Units
Linear Gain	17.8	18.9	19.1	dB
Drain Efficiency	68.9	73.3	68.2	%
Output Power	51.2	50.6	50.9	dBm

- Typical Class AB performance in Raytron DEMO_A with the device soldered onto the heatsink, test condition: V_{DS} = 28V, I_{DS} = 200mA, V_{GS} = -2.65V
- Test Condition: Pulse, Pulse width = 100μs, Duty cycle = 10%

5. Block Diagram

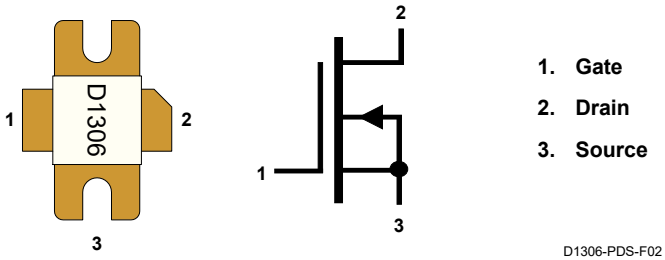

D1306-PDS-F02

Figure 2. D1306 Block Diagram

Table of Contents

No.	Contents	Page
1	Description	1
2	Applications	1
3	Features	1
4	Brief Typical Performance	1
5	Block Diagram	1
6	Absolute Maximum Ratings	3
7	Recommended Operating Conditions	3
8	Electrical Characteristics	3
9	Typical Performance	4
10	Wide-band Application Performance	5
11	Package Outline	5
12	Application Circuit	6
13	DEMO Summary	7
14	Recommended Solder Temperature Profile	8
15	Handling Precautions	8
16	Contact Information	8
17	Disclaimer	9

6. Absolute Maximum Ratings

Table 2. Absolute Maximum Ratings

Parameter	Symbol	Rating	Units
Drain-Source Voltage	V_{DSS}	120	V
Gate-Source Voltage	V_{GS}	-10 ~ +1	V
Operating Voltage	V_{DS}	10 ~ +40	V
Maximum Forward Gate Current	I_{GMax}	18.50	mA
Storage Temperature Range	T_{STG}	-65 ~ +150	°C
Operating Junction Temperature	T_J	250	°C

7. Recommended Operating Conditions

Table 3. Recommended Operating Conditions

Parameter	Min.	Typ.	Max.	Units
Drain-Source Voltage Range, V_{DS}	-	28	40	V
Drain Bias Current, I_{DS}	-	100	-	mA
Gate-Source Voltage, V_{GS}	-	-2.65	-	V
Channel Temperature, T_{CH}	-	-	225	°C

Table 4. Thermal Resistance

Parameter	Symbol	Value	Unit
Thermal Resistance (Active Die Surface-to-Case)[1]	R_{thsc} (IR)	1.31	°C/W
Thermal Resistance (Junction-to-Case)[2]	R_{thjc} (FEA)	1.61	°C/W

1. Thermal Resistance at average power by infrared measurement, Active Die Surface-to-Case, $T_{base\text{-}plate}$ = 85°C, P_D = 64.0W
2. Thermal Resistance at average power by Finite Element Analysis, Junction-to-Case, $T_{base\text{-}plate}$ = 85°C, $T_{junction}$ = 200°C

8. Electrical Characteristics (T_C = 25˚C)

Table 5. DC Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units
Drain-Source Breakdown Voltage[1] (V_{GS} = -10V, I_{DS} = 18.5mA)	$V_{DS(BR)}$	120	-	-	V
Saturated Drain Current[2] (V_{DS} = 10V, V_{GS} = 1.0V)	I_{Max}	-	20.41	-	A
Gate Threshold Voltage[3] (V_{DS} = 28V, I_{DS} = 18.5mA)	$V_{GS(th)}$	-3.30	-2.80	-2.30	V
Gate Quiescent Voltage[3] (V_{DS} = 28V, I_{DS} = 200mA)	$V_{GS(Q)}$	-	-2.65	-	V

1. Measured on wafer prior to packaging
2. Measured with packaged device
3. Typical Class AB performance in Raytron DEMO

Table 6. RF Characteristics[1,2]

Test Method	Parameter	Symbol	Min.	Typ.	Max.	Units
DEMO @1.3GHz	Linear Gain	G_{LIN}	-	17.8	-	dB
	Drain Efficiency	η_D	-	68.9	-	%
	Output Power	P_{SAT}	-	51.2	-	dBm
DEMO @1.6GHz	Linear Gain	G_{LIN}	-	18.9	-	dB
	Drain Efficiency	η_D	-	73.3	-	%
	Output Power	P_{SAT}	-	50.6	-	dBm
DEMO @1.95GHz	Linear Gain	G_{LIN}	-	19.1	-	dB
	Drain Efficiency	η_D	-	68.2	-	%
	Output Power	P_{SAT}	-	50.9	-	dBm

[1]. Typical Class AB performance in Raytron DEMO_A with the device soldered onto the heatsink, test condition: V_{DS} = 28V, I_{DS} = 200mA, V_{GS} = -2.65V

[2]. Test Condition: Pulse, Pulse width = 100μs, Duty cycle = 10%

Table 7. Dynamic Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units
Input Capacitance	C_{GS}	-	74.15	-	pF
Output Capacitance	C_{DS}	-	7.86	-	pF
Feedback Capacitance	C_{GD}	-	1.22	-	pF

- Test Condition: V_{DS} = 28V, V_{GS} = -8V, f = 1MHz

9. Typical Performance

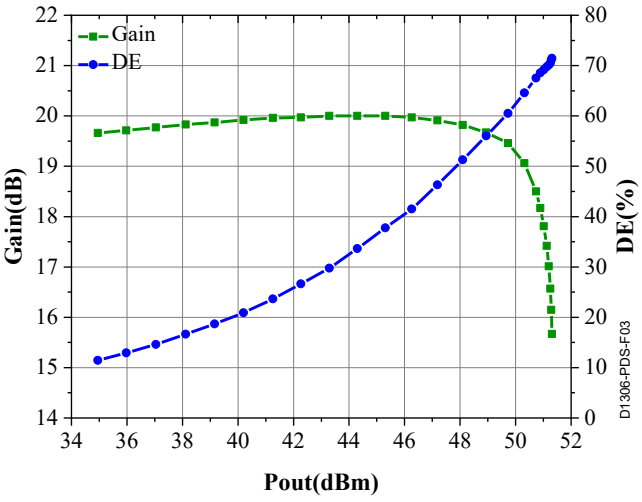


Figure 3. 1.45GHz Gain and DE @ MXP vs. Output Power

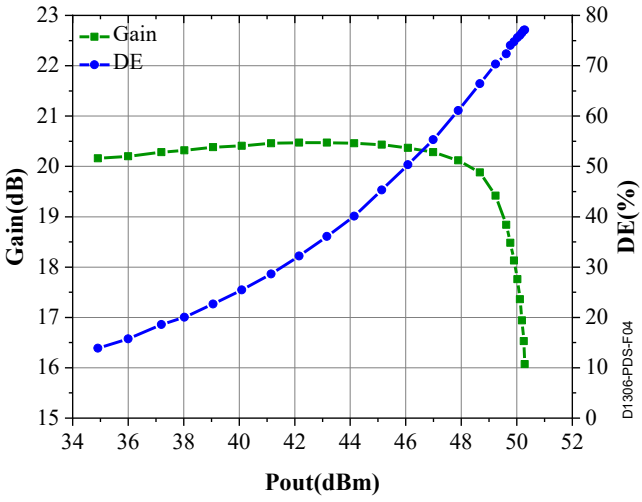


Figure 4. 1.45GHz Gain and DE @ MXE vs. Output Power

- Typical Class AB performance in Raytron DEMO with the device soldered onto the heatsink, test condition: V_{DS} = 28V, I_{DS} = 200mA, V_{GS} = -2.65V
- Test Condition: Pulse, Pulse width = 100μs, Duty cycle = 10%

10. Wide-band Application Performance

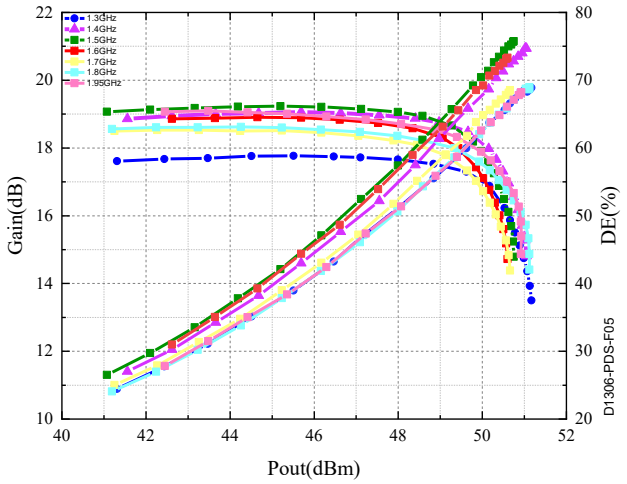


Figure 5. Wide-band Application Gain and DE vs. Output Power

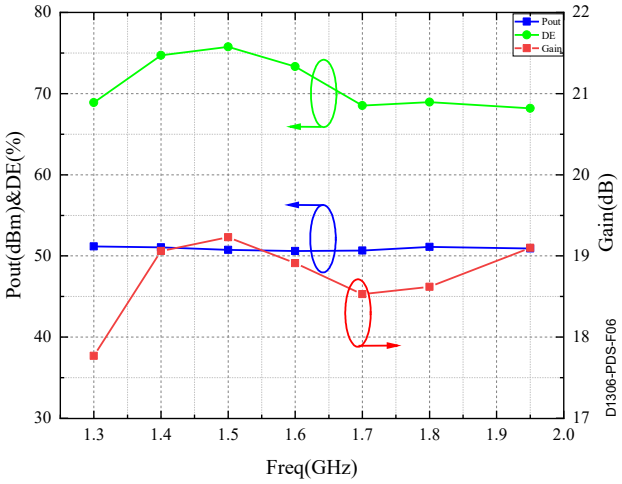


Figure 6. Wide-band Application Gain and DE vs. Freq.

- Typical Class AB performance in Raytron Wide-band Application DEMO_A with the device soldered onto the heatsink, test condition: V_{DS} = 28V, I_{DS} = 200mA, V_{GS} = -2.65V
- Test Condition: Pulse, Pulse width = 100μs, Duty cycle = 10%
- The output power reaches50.6dBm (115W) at 1.30-1.95GHz. It can be used in the avionics and L band radar application.

11. Package Outline

■ Pin Layout

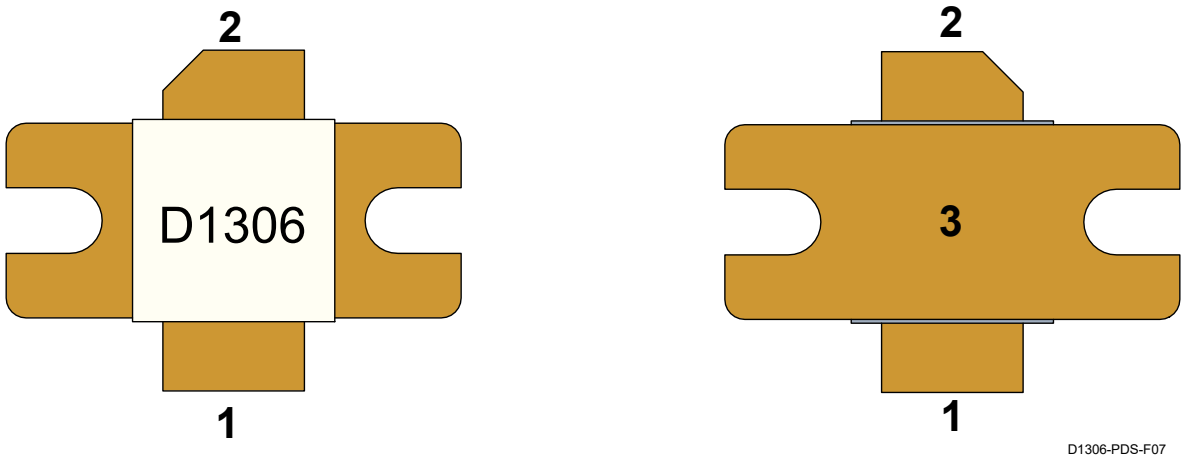


Figure 7. D1306 Pin Layout

Table 8. Pin Description

Pin	Symbol	Description
1	V_G / RF IN	Gate voltage / RF Input
2	V_D / RF OUT	Drain voltage / RF Output
3	Flange	Source to be Connected to Ground

■ Mechanical Drawing (Package Type: 400F-A)

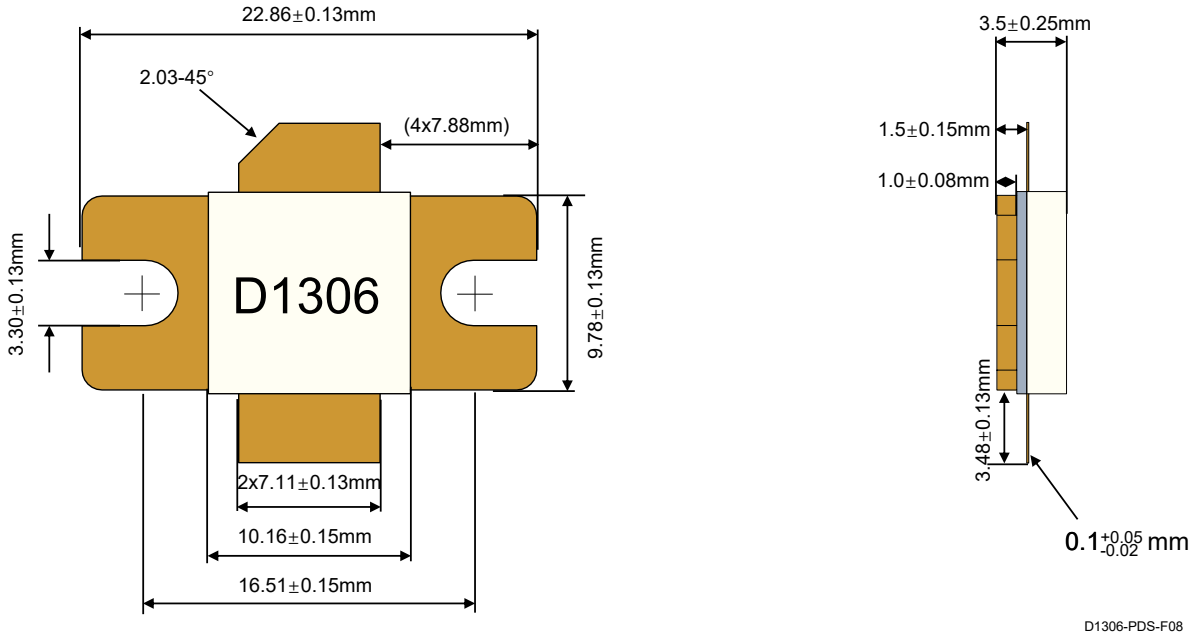


Figure 8. D1306 Mechanical Drawing

12. Application Circuit

■ Schematic

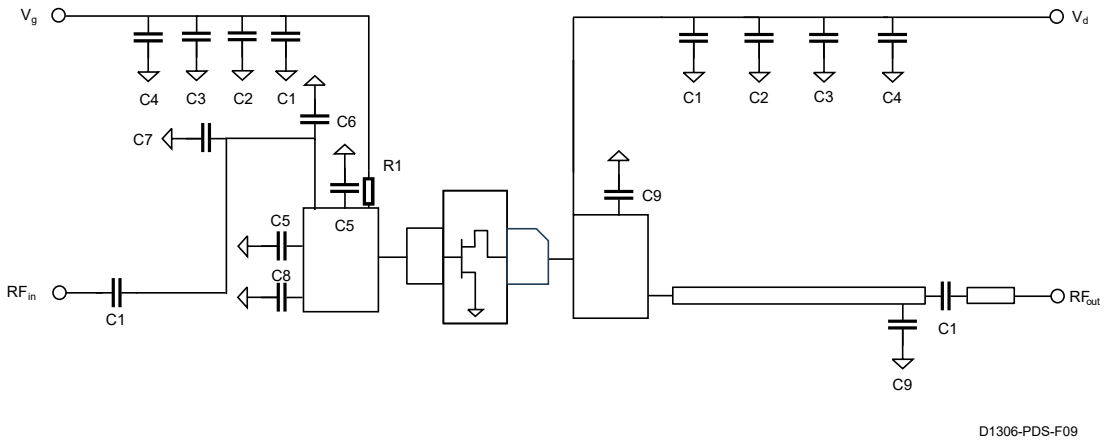


Figure 9. D1306 DEMO_A Application Circuit Schematic

Table 9. Bias Procedure

Bias-up Procedure	Bias-down Procedure
1) Set V_{GS} to the pinch-off voltage, typically -6V	1) Turn off RF signal
2) Turn on V_{DS} to nominal supply voltage (28V)	2) Turn off V_{DS}
3) Slowly adjust V_{GS} until I_{DS} current is attained	3) Wait two seconds to allow drain capacitor to discharge
4) Apply RF input power to desired level	4) Turn off V_{GS}

■ Layout

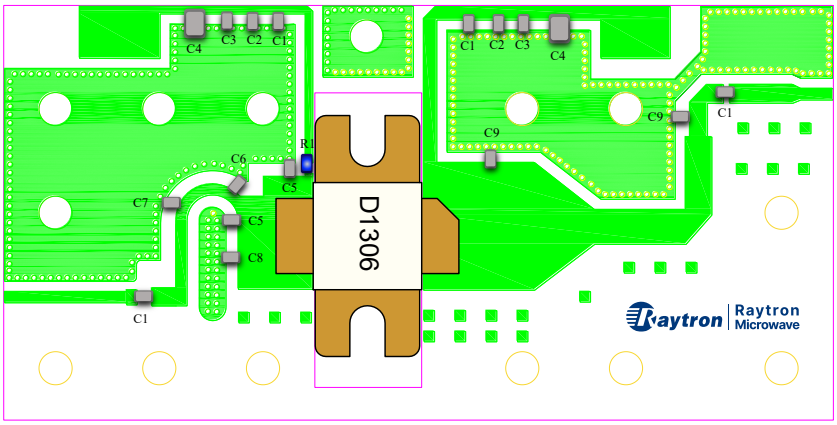


Figure 10. D1306 Application Circuit Layout
(DEMO_A Size: 8.0cm x 4.0cm)

Table 10. Bill of Materials

Component	Value	Description	Manufacturer	Part Number
PCB	20mil	N/A	Rogers	RO4350B
C1	25pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E250GB12D
C2	100pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E101JB12D
C3	1000pF	X7S 100V 0603 Capacitor	Murata	GCM188R72A102KA37D
C4	1.0uF	X7R 100V 1210 Capacitor	Murata	GRM32ER72A105KA01L
C5	3.0pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E3R0BB12D
C6	1.0pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E1R0BB12D
C7	1.7pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E1R7BB12D
C8	0.3pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2ER30WB12D
C9	0.5pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2ER50WB12D
R1	10Ω	1/8W 0805 Resistor	Yageo	RC0805FR-0710RL

13. DEMO Summary

Table 11. DEMO Summary

NO.	D1306 DEMO Name	V_{DS} (V)	Freq (GHz)	Linear Gain(dB)	P_{SAT} (dBm)	P_{SAT} (W)	Drain Efficiency	Pulse or CW
1	DEMO_A, 115W	28	1.3-1.95	17.8	50.6	115	68%	Pulse
2	DEMO_B, 135W	28	1.67-1.69	19.9	51.4	135	75%	Pulse
3	DEMO_C, 100W	28	2.2-2.4	16.9	50.3	107	67%	Pulse

14. Recommended Solder Temperature Profile

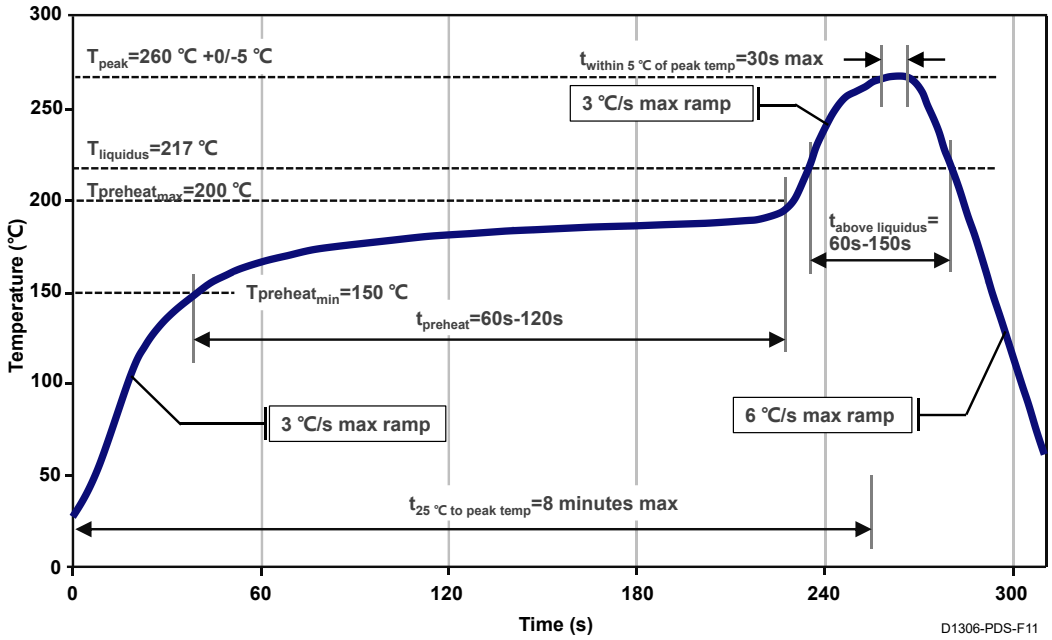


Figure 11. Recommended Solder Temperature Profile

15. Handling Precautions

- **ESD Caution**

  ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore proper ESD precautions should be taken to avoid performance degradation or loss of functionality.



16. Contact Information

For the latest specifications, additional product information, technical support and sales support, please contact:

- **Email:** RF.support@raytrontek.com
- **Web:** www.raytrontek.com

17. Disclaimer

The information provided here is believed to be reliable at the time of publication. Raytron reserves the right to make changes to its products, specifications and product descriptions at any time without notice. Raytron assumes no responsibility for the use of this information and all such information should entirely be at the user's own risk. Raytron makes no warranty about the suitability of its products for specific purpose or application and disclaims all liability, including without limitation consequential and incidental damages. Raytron does not authorize or warrant any Raytron products for use in the life support devices or systems.

Raytron Microwave
Copyright @ Raytron Technology Co., Ltd.