
1. Description

- The D2703 is a 1400W (P_{SAT}) wideband pre-matched gallium nitride (GaN) high electron mobility transistor (HEMT).
- The D2703 operates from DC to 3GHz with a 48V supply rail. The device is offered in an industry standard air cavity package.

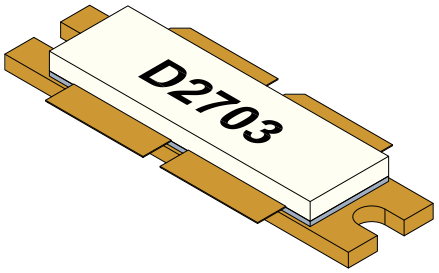

D2703-PDS-F01

Figure 1. D2703 Package Outline

2. Applications

- Military and Civilian Radar
- Land Mobile and Military Radio Communications
- Weather Radar
- Secondary Radar

3. Features

- Operating Frequency: DC–3GHz
- Output Power[1] (P_{SAT}): 61.8dBm (1513W)
- Linear Gain[1]: 20dB
- Typical DE[1] @P_{SAT}: 80%
- Operating Voltage: 48V
- Pulse Capable
- Package Type: 1230F-A

[1] Measured in Raytron DEMO @1.2GHz


4. Brief Typical Performance

Table 1. Brief Typical Performance

Parameter	0.96GHz	1.1GHz	1.25GHz	Units
Linear Gain	17.3	16.7	18.6	dB
Drain Efficiency	56.7	73.4	68.5	%
Output Power	60.7	60.9	60.7	dBm
Output Power	1175	1230	1175	W

- Typical Class AB performance in Raytron DEMO_A with the device soldered onto the heatsink, test condition: V_{DS} = 48V, I_{DS} = 1000mA, V_{GS} = -3.2V
- Test Condition: Pulse, Pulse width = 100μs, Duty cycle = 2%

5. Block Diagram

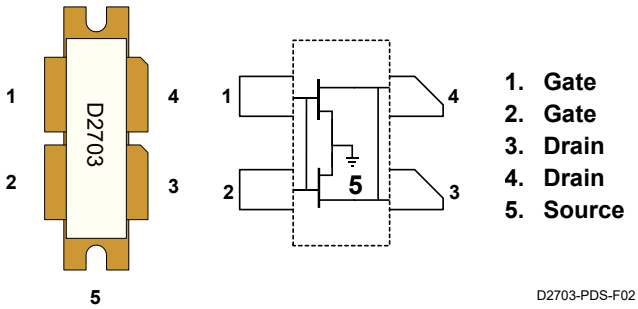

1. Gate
2. Gate
3. Drain
4. Drain
5. Source

D2703-PDS-F02

Figure 2. D2703 Block Diagram

Table of Contents

No.	Contents	Page
1	Description	1
2	Applications	1
3	Features	1
4	Brief Typical Performance	1
5	Block Diagram	1
6	Absolute Maximum Ratings	3
7	Recommended Operating Conditions	3
8	Electrical Characteristics	3
9	Wide-band Application Performance	4
10	Package Outline	5
11	Application Circuit	6
12	DEMO Summary	7
13	Recommended Solder Temperature Profile	8
14	Handling Precautions	8
15	Contact Information	8
16	Disclaimer	9

6. Absolute Maximum Ratings

Table 2. Absolute Maximum Ratings

Parameter	Symbol	Rating	Units
Drain-Source Voltage	V_{DSS}	150	V
Gate-Source Voltage	V_{GS}	-10 ~ +1	V
Operating Voltage	V_{DS}	10 ~ +55	V
Maximum Forward Gate Current	I_{GMax}	201.6	mA
Storage Temperature Range	T_{STG}	-65 ~ +150	°C
Operating Junction Temperature	T_J	250	°C

7. Recommended Operating Conditions

Table 3. Recommended Operating Conditions

Parameter	Min.	Typ.	Max.	Units
Drain-Source Voltage Range, V_{DS}	-	50	55.0	V
Drain Bias Current, I_{DS}	-	1000	-	mA
Gate-Source Voltage, V_{GS}	-	-3.2	-	V
Channel Temperature, T_{CH}	-	-	225	°C

Table 4. Thermal Resistance

Parameter	Symbol	Value	Unit
Thermal Resistance (Active Die Surface-to-Case)	R_{thsc} (IR)	-	°C/W
Thermal Resistance (Junction-to-Case)	R_{thjc} (FEA)	0.25	°C/W

1. Thermal Resistance at average power by infrared measurement, Active Die Surface-to-Case, $T_{base\text{-}plate}$ = 85℃, P_D = 280.0W

2. Thermal Resistance at average power by Finite Element Analysis, Junction-to-Case, $T_{base\text{-}plate}$ = 85℃, P_D = 280.0W

8. Electrical Characteristics (T_C = 25˚C)

Table 5. DC Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units
Drain-Source Breakdown Voltage[1] (V_{GS} = -10V, I_{DS} = 201.6mA)	$V_{DS(BR)}$	150	-	-	V
Saturated Drain Current[1] (V_{DS} = 10V, V_{GS} = 1.0V)	I_{Max}	-	209.60	-	A
Gate Threshold Voltage[2] (V_{DS} = 48V, I_{DS} = 201.6mA)	$V_{GS(th)}$	-3.95	-3.32	-2.60	V
Gate Quiescent Voltage[2] (V_{DS} = 48V, I_{DS} = 1000mA)	$V_{GS(Q)}$	-	-3.20	-	V

1. Scaled from PCM data

2. Measured in Raytron DEMO

Table 6. RF Characteristics @ DEMO_A[1,2]

Parameter	0.96GHz	1.0GHz	1.05GHz	1.1GHz	1.15GHz	1.2GHz	1.25GHz	Units
Linear Gain	17.3	17.1	16.6	16.7	17.4	18.3	18.6	dB
Drain Efficiency	56.7	69.1	72.8	73.4	69.7	71.1	68.5	%
Output Power	60.7	61.3	61.1	60.8	60.6	60.8	60.7	dBm
Output Power	1175	1349	1288	1202	1148	1202	1175	W

1. Typical Class AB performance in Raytron DEMO_A with the device soldered onto the heatsink, test condition: V_{DS} = 48V, I_{DS} = 1000mA, V_{GS} = -3.2V
2. Test Condition: Pulse, Pulse width = 100μs, Duty cycle = 2%

Table 7. Dynamic Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units
Input Capacitance	C_{GS}	-	320.24	-	pF
Output Capacitance	C_{DS}	-	70.80	-	pF
Feedback Capacitance	C_{GD}	-	9.58	-	pF

- Test Condition: V_{DS} = 48V, V_{GS} = -8V, f = 1MHz

9. Wide-band Application Performance

■ Wide-band Application Performance (DEMO_A: 0.96-1.25GHz)

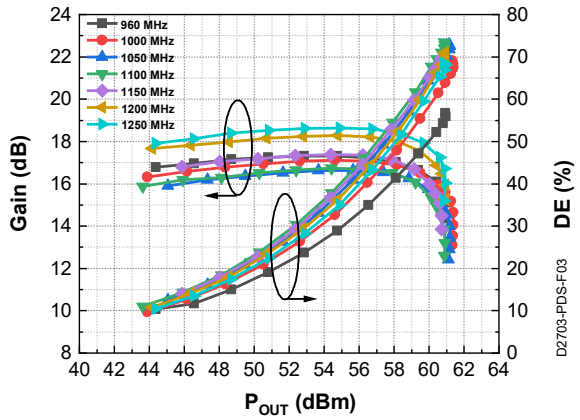


Figure 3. Wide-band Application Gain and DE vs. Output Power

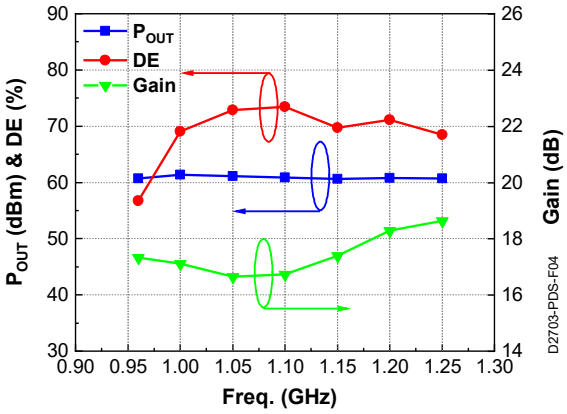


Figure 4. Wide-band Application P_{OUT} Gain and DE vs. Freq.

- Typical Class AB performance in Raytron Wide-band Application DEMO_A with the device soldered onto the heatsink, test condition: V_{DS} = 48V, I_{DS} = 1000mA, V_{GS} = -3.2V
- Test Condition: Pulse, Pulse width = 100μs, Duty cycle = 2%
- The output power is 60.5dBm (1122W) at 0.96-1.25GHz. It can be used in the avionics and L band radar application.

10. Package Outline

■ Pin Layout

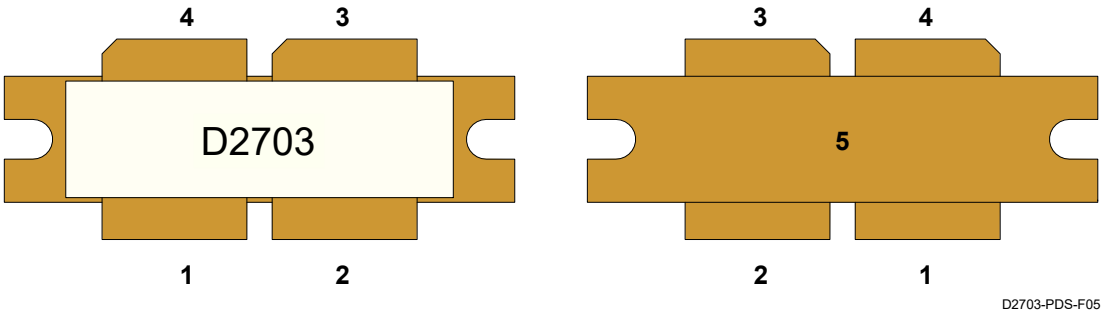


Figure 5. D2703 Pin Layout

Table 8. Pin Description

Pin	Symbol	Description
1/2	V_G / RF_{IN}	Gate Voltage / RF Input
3/4	V_D / RF_{OUT}	Drain Voltage / RF Output
5	Flange	Source to be Connected to Ground

■ Mechanical Drawing (Package Type: 1230F-A)

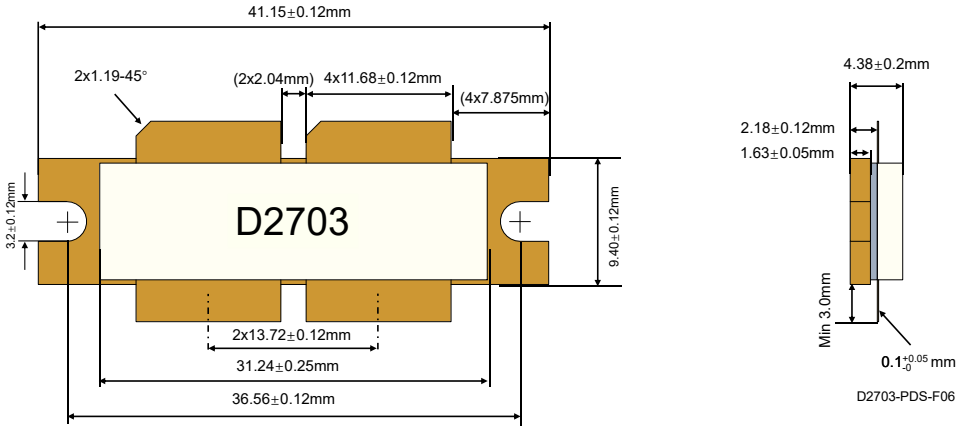


Figure 6. D2703 Mechanical Drawing

11. Application Circuit

■ Schematic

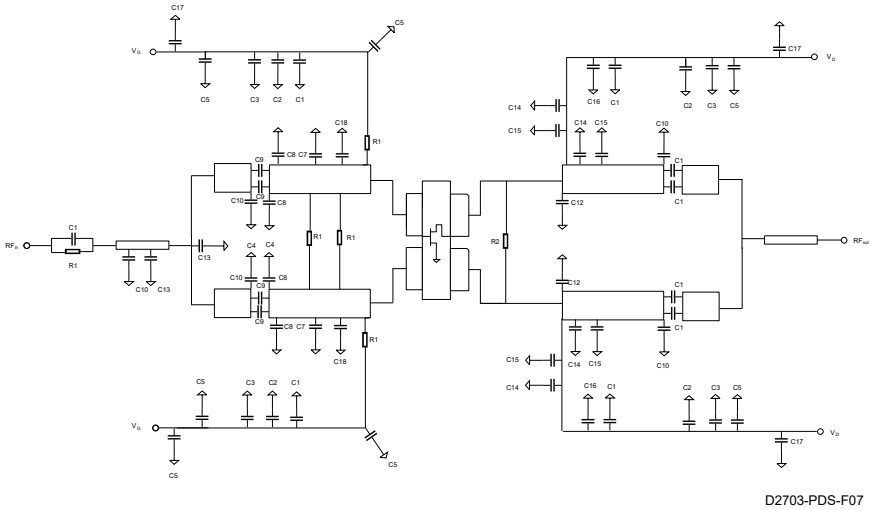


Figure 7. D2703 DEMO_A Application Circuit Schematic

Table 9. Bias Procedure

Bias-up Procedure	Bias-down Procedure
1) Set V_{GS} to the pinch-off voltage, typically -6V	1) Turn off RF signal
2) Turn on V_{DS} to nominal supply voltage (48V)	2) Turn off V_{DS}
3) Slowly adjust V_{GS} until I_{DS} current is attained	3) Wait two seconds to allow drain capacitor to discharge
4) Apply RF input power to desired level	4) Turn off V_{GS}

■ Layout

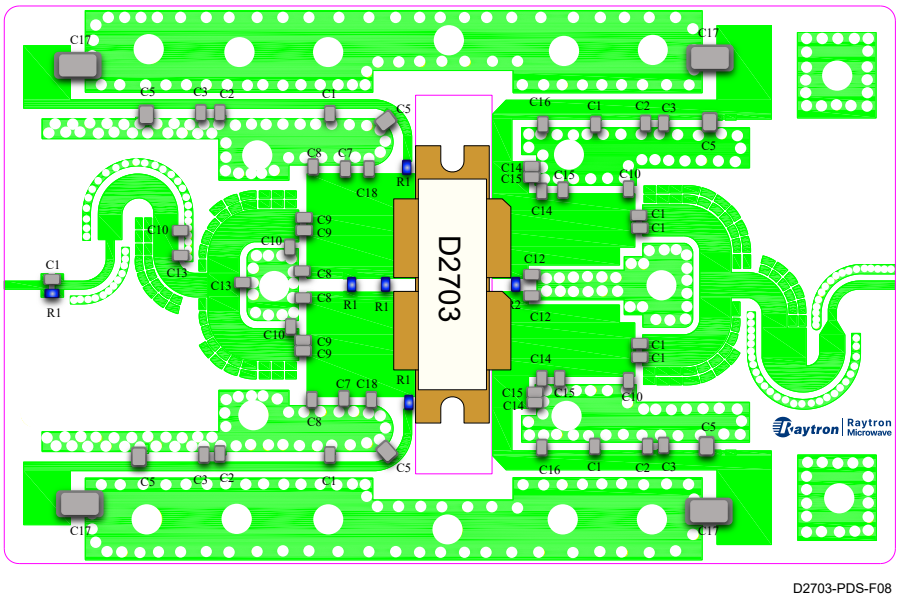


Figure 8. D2703 Application Circuit Layout
(DEMO_A Size: 12 x 7.5cm)

Table 10. Bill of Materials of DEMO_A

Component	Value	Description	Manufacturer	Part Number
PCB	20mil	N/A	Rogers	RO4350B
C1	30.0pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E300GB12
C2	100.0pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E101JB12
C3	1000.0pF	X7R 100V 0603 Capacitor	Murata	GCM1885C2A102JA16D
C5	4.7uF	X7R 100V 1206 Capacitor	Murata	GRM31CC72A475KE11L
C7	4.0pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E4R0CB12
C8	2.3pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E2R3BB12
C9	7.5pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E7R5CB12
C10	3.5pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E3R5BB12
C12	9.0pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E9R0CB12
C13	5.5pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E5R5BB12
C14	7.0pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E7R0CB12
C15	3.0pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E3R0BB12
C16	62pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E620JB12
C17	470uF	100V,470uF	JWCO	N/A
C18	1.4pF	C0G 250V 0805 Capacitor	Murata	GQM2195C2E1R4BB12
R1	10Ω	1/8W 0805 Resistor	Yageo	RC0805FR-0710RL
R2	2Ω	1/2W 1210 Resistor	Yageo	RC1210FR-072RL

12. DEMO Summary

Table 11. DEMO Summary

NO.	D2703 DEMO Name	V_{DS} (V)	Freq (GHz)	Linear Gain(dB)	P_{SAT} (dBm)	P_{SAT} (W)	Drain Efficiency	Pulse or CW
1	DEMO_A, 1100W	48	0.96-1.25	16.6	60.6	1148	56.7%	Pulse

13. Recommended Solder Temperature Profile

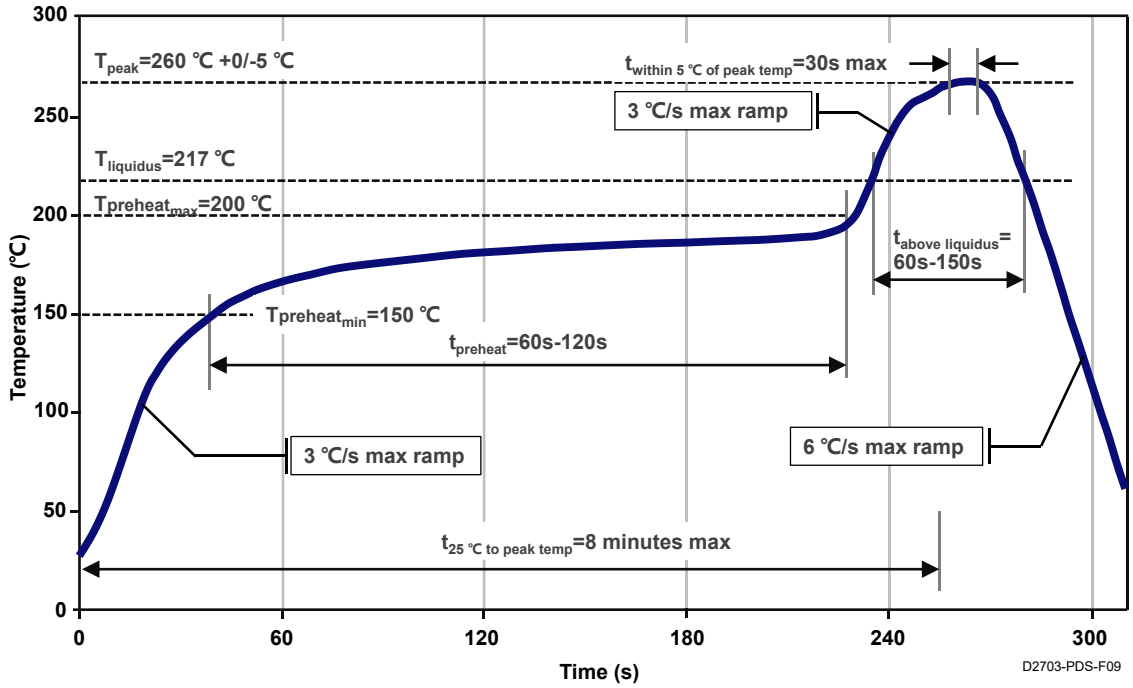


Figure 9. Recommended Solder Temperature Profile

14. Handling Precautions

- **ESD Caution**

  ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore proper ESD precautions should be taken to avoid performance degradation or loss of functionality.



15. Contact Information

For the latest specifications, additional product information, technical support and sales support, please contact:

- **Email:** RF.support@raytrontek.com
- **Web:** www.raytrontek.com

16. Disclaimer

The information provided here is believed to be reliable at the time of publication. Raytron reserves the right to make changes to its products, specifications and product descriptions at any time without notice. Raytron assumes no responsibility for the use of this information and all such information should entirely be at the user's own risk. Raytron makes no warranty about the suitability of its products for specific purpose or application and disclaims all liability, including without limitation consequential and incidental damages. Raytron does not authorize or warrant any Raytron products for use in the life support devices or systems.

Raytron Microwave
Copyright @ Raytron Technology Co.,Ltd