
1. Description

- The MA007(M) is a limiter fabricated using GaAs IPD MMIC process. The device operates from 12 to 18.5GHz, with an insertion loss of less than 0.7dB, input and output return loss less than -16dB, a power handling capability of 44dBm (100us pulse width, 20% duty cycle), and a flat leakage of 14.5dBm.

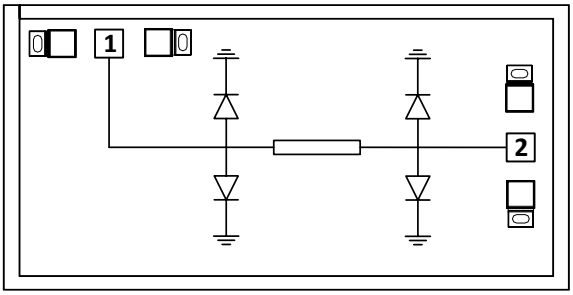

MA007(M)-PDS-F01

Figure 1. MA007(M) Functional Block Diagram

2. Applications

- RX Modules

3. Features

- Operating Frequency: 12-18.5GHz
- Insertion Loss: -0.7dB
- Input/Output Return Loss: -16dB / -16dB
- Power Handling Capability: 44dBm (100us pulse width,20% duty cycle)
- Flat Leakage: 14.5dBm
- Die Size: 1.3 x 1.0 x 0.1mm

4. Brief Typical Performance

Table 1. Brief Typical Performance

Parameter	12-18.5GHz	Units
Insertion Loss	-0.7	dB
Input Return Loss	-16	dB
Output Return Loss	-16	dB
Power Handing Capability	44	dBm
Flat Leakage at P_{IN}>20dBm	14.5	dBm

Test condition: input signal 100us pulse width,20% duty cycle

Table of Contents

No.	Contents	Page
1	Description	1
2	Applications	1
3	Features	1
4	Brief Typical Performance	1
5	Recommended Operating Conditions	3
6	RF Characteristics	3
7	Typical Performance Curve	3
8	Outline Dimensions	4
9	Assembly Information	5
10	Handling Precautions	5
11	Contact Information	6
12	Disclaimer	6

5. Recommended Operating Conditions

Table 2. Recommended Operating Conditions

Parameter	Min.	Typ.	Max.	Units
Operating Temperature Range	-55	25	125	°C
Operating Frequency	12	-	18.5	GHz
Maximum Input Power	-	-	44	dBm

6. RF Characteristics (T_C = 25˚C)

Table 3. RF Characteristics[1]

Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Frequency	Freq	12	-	18.5	GHz
Insertion Loss	IL	-	-0.7	-	dB
Input Return Loss	RLin	-	-16	-	dB
Output Return Loss	RLout	-	-16	-	dB
Power Handing Capability	Pc	-	44	-	dBm
Flat Leakage	FL	-	14.5	-	dBm

[1].Test condition: input signal 100us pulse width,20% duty cycle

7. Typical Performance Curve

■ **Small-signal Characteristics Curve**

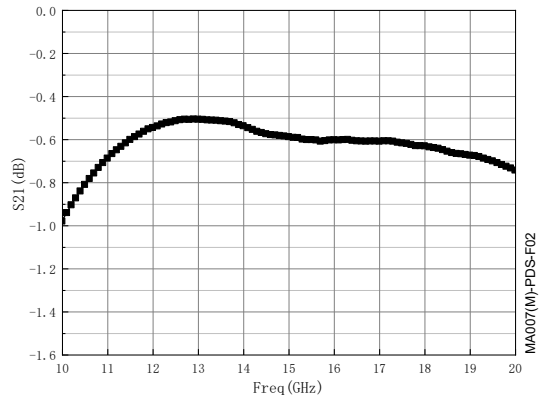


Figure 2. Insertion Loss Characteristics

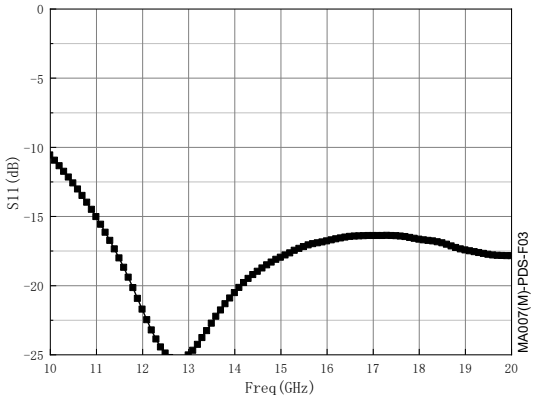


Figure 3. Input Return Loss Characteristics

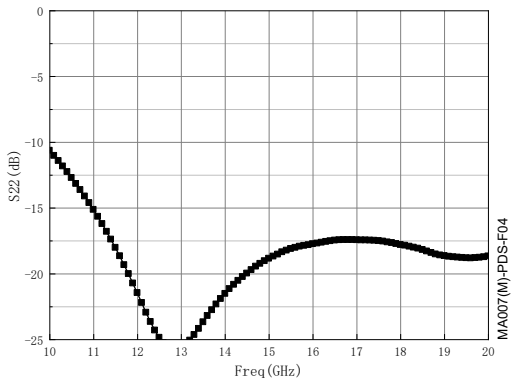


Figure 4. Output Return Loss Characteristics

■ Power Characteristics Curve


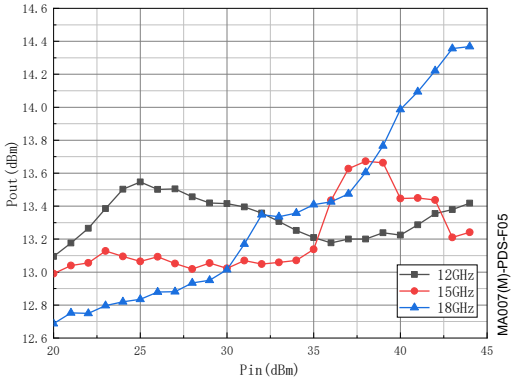


Figure 5. Flat Leakage Characteristics

8. Outline Dimensions

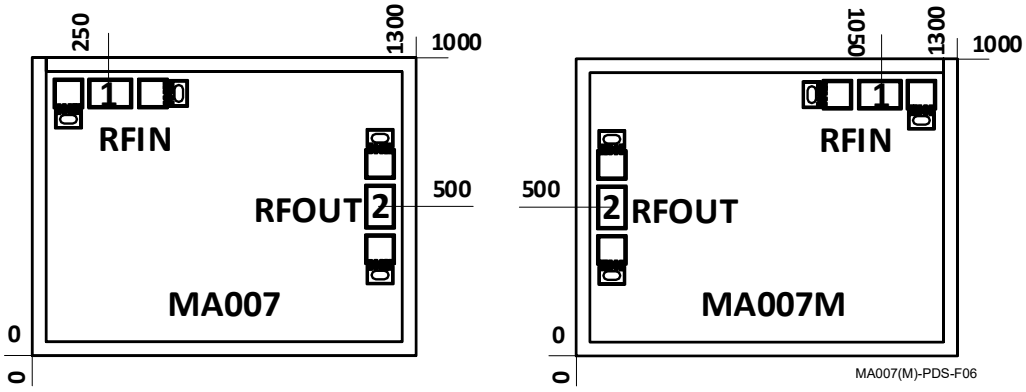

- Dimensions shown in micrometre

Figure 6. MA007(M) Outline Dimensions

Table 4. Pad Description

Pad	Symbol	Description
1	RFIN	RF Input
2	RFOUT	RF Output

9. Assembly Information

■ **Assembly Diagram**

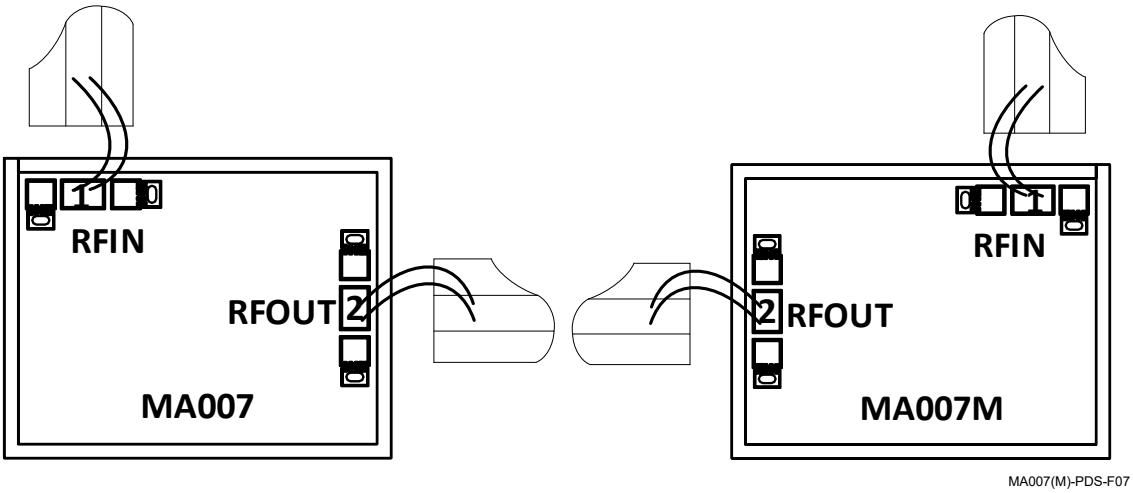


Figure 7. MA007(M) Assembly Diagram

- **Eutectic Die Attach:** It is best to use an 80% Au/20% Sn preform. Do not expose the chip to a temperature greater than 300°C for more than 30sec.
- **Wire Bonding:** 3 pieces of 2mil gold wire are used for the RF input port, and 2 pieces of 1mil gold wire for the RF output port. Keep all bonds as short as possible, less than 0.35mm.

10. Handling Precautions

■ **Storage**

All bare dies ship in either Waffle or Gel Pak, which is an ESD protective container, and then sealed in an ESD protective bag. After opening the sealed ESD protective bag, all dies must be stored in a dry nitrogen environment.

■ **Cleanliness**

Handle the dies in a clean environment. Never use liquid cleaning systems to clean the dies.

■ **ESD Caution**

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore proper ESD precautions should be taken to avoid performance degradation or loss of functionality.



11. Contact Information

For the latest specifications, additional product information, technical support and sales support, please contact:

- **Email:** RF.support@raytrontek.com
- **Web:** www.raytrontek.com

12. Disclaimer

The information provided here is believed to be reliable at the time of publication. Raytron reserves the right to make changes to its products, specifications and product descriptions at any time without notice. Raytron assumes no responsibility for the use of this information and all such information should entirely be at the user's own risk. Raytron makes no warranty about the suitability of its products for specific purpose or application and disclaims all liability, including without limitation consequential and incidental damages. Raytron does not authorize or warrant any Raytron products for use in the life support devices or systems.

Raytron Microwave

Copyright @ Raytron Technology Co.,Ltd.